


Notes:

1. 30AWG 150Ω SHIELDED PARALLEL PAIR CABLE
2. CHARACTERISTIC DIFFERENTIAL IMPEDANCE 150Ω ±10Ω
3. MAXIMUM SKEW BETWEEN CONDUCTORS IN A PAIR 200psec
4. ASSEMBLY TO BE LABELLED AS FOLLOWS:

"Part Number"
REV. "level"
"YrWk" Methode
MADE IN XXXXXX

5. PINNING AS PER FIBRE CHANNEL PHYSICAL INTERFACE (FC-PI) REV 5.2

Part Number	Length 'L'	AWG
132-30-50	0.5M ± 50mm	30 AWG
132-30-60	0.6M ± 50mm	
132-30-100	1M ± 50mm	
132-30-300	3M ± 50mm	
132-30-500	5M ± 50mm	

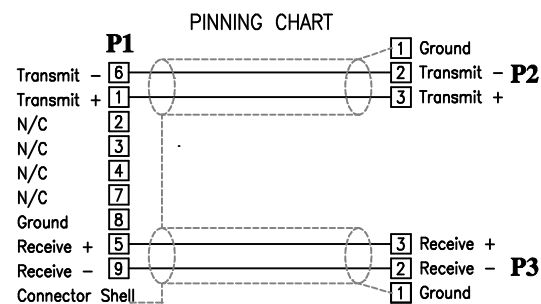

Material:	Dimensions. unless otherwise specified Dimensions in mm [Inches]	
Finish: Matt Black Over Mould	Tolerances on:	
	Metric	[Inches]
	XX.XX = ± 0.025	.0000 = ± .001
	XX.X = ± 0.127	.000 = ± .005
	XX = ± 0.25	.00 = ± .010
		.0 = ± .015
	Angles 2°	

METHODE ELECTRONICS.		
Title: DB-9 Female TO IDAC		
Part Number: 132-30-XXX		
Date: 14/01/2000	Rev: C	File Name: 132-30-XXX.DWG
Drawn by: J. Keane	Check By: W. Corley	Approved by: C. Henry
Scale: 1:1	Size: A3	Page 1 of 1